




Activating the DG1000Z Memory Expansion License

*Date:*02/19/2014

Solution: Here are the instructions for upgrading your DG1000Z to the higher memory capacity.


NOTE: You can obtain license key from your local Rigol service center. Enter the license key to www.rigol.com and select Customer center > License Generate to get the license code.

1. Create a .txt file using the Serial number of DG1000Z as the first entry.
2. The second entry is the license number without the dashes "-". Press Enter to add a third line. The third line should remain blank.

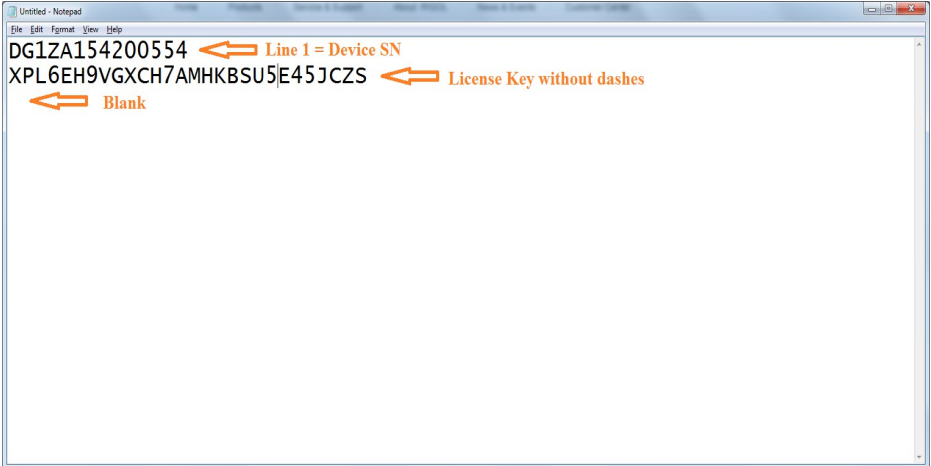



4. Rename the file extension to ".lic" by right-clicking on the file

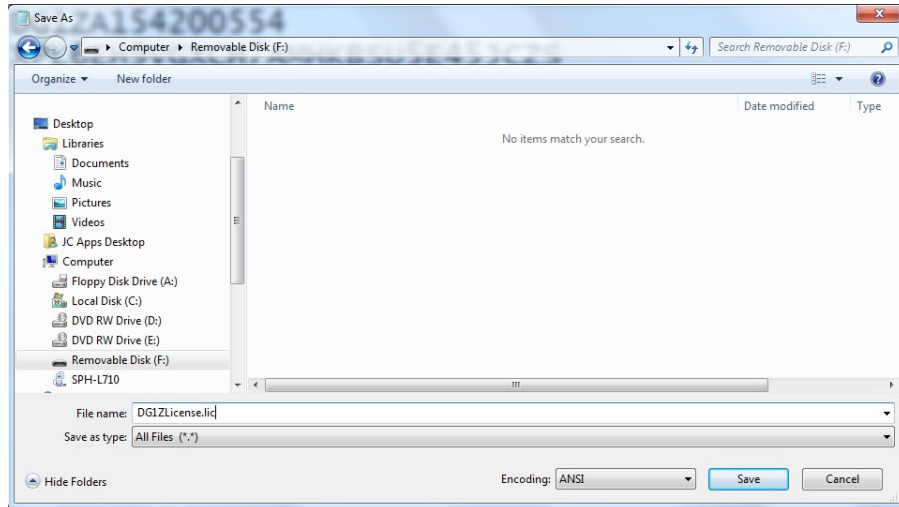

5. Save the .lic file to a USB stick
6. Insert the USB stick into the front panel of the DG1Z
7. Press the Storage key on the front panel
8. Set Browser to Dir and use the scroll wheel on the front panel to select the :D drive. This is the USB stick drive letter.
9. Set Browser to File
10. Set File Type to All (On menu page 2.. press down arrow to access)
11. Use wheel to highlight the “.lic” file saved before
12. Press Read
13. The instrument should indicate that the installation of the option was successful.



Headquarters

RIGOL TECHNOLOGIES, INC.

No.156,Cai He Village,

Sha He Town,

Chang Ping District, Beijing,

102206 P.R.China

Tel:+86-10-80706688

Fax:+86-10-80705070

Email: support@rigol.com

USA

RIGOL TECHNOLOGIES,USA INC.

7401 First Place, Suite N

Oakwood Village

OH 44164, USA

Toll free: 877-4-RIGOL-1

Office: (440) 232-4488

Fax: (216)-754-8107

Email: info@rigol.com

EUROPE

RIGOL TECHNOLOGIES GmbH

Lindbergh str. 4

82178 Puchheim

Germany

Tel: 0049- 89/89418950

Email: info-europe@rigoltech.com