



## Saving a Trace as a CSV with the DSA800 Series


*Date:* 06.03.2015

*Solution:* To save a trace as a CSV:

- 2) Insert USB stick into the USB port on the front panel

**NOTE:** The format of the USB stick must be FAT32


- 2) Press STORAGE > Set BROWSER to DIR. You can press the button next to the Browser label to toggle the selection.

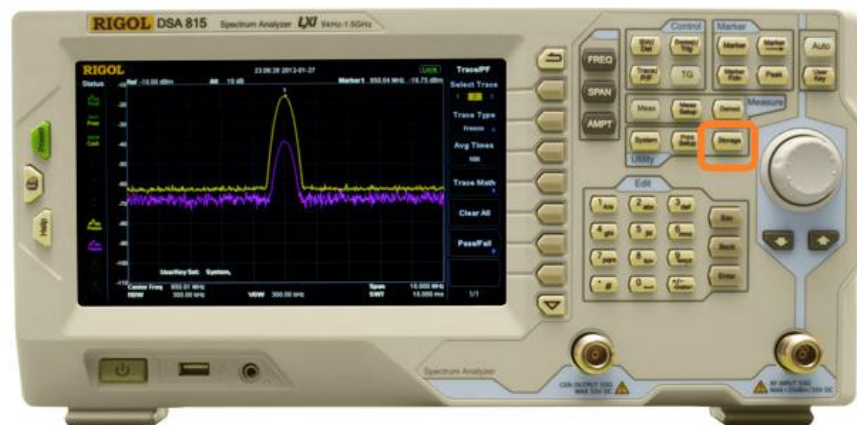

**NOTE:** The spectrum analyzer uses binary files (\*.trc) and cannot use CSV files (\*.csv) natively. CSV will not be available as a valid format if you are trying to save the file to the local drive (D:)




3) Use the scroll wheel to select Mobile Disk (E:)

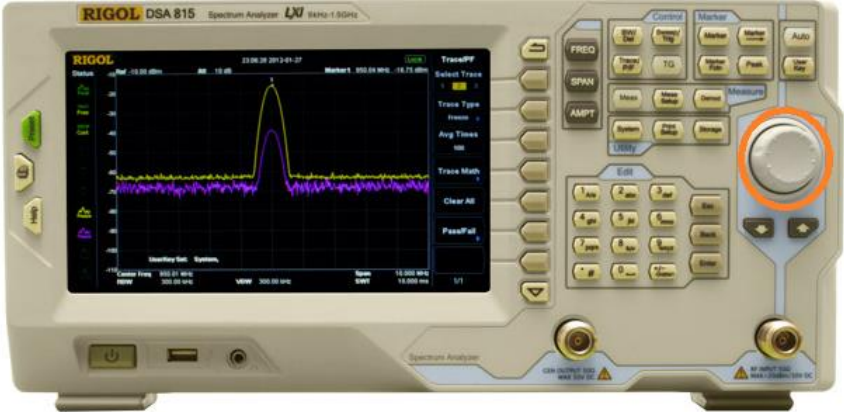




4) Change File Type to Trace and press the back arrow to get back to the storage screen



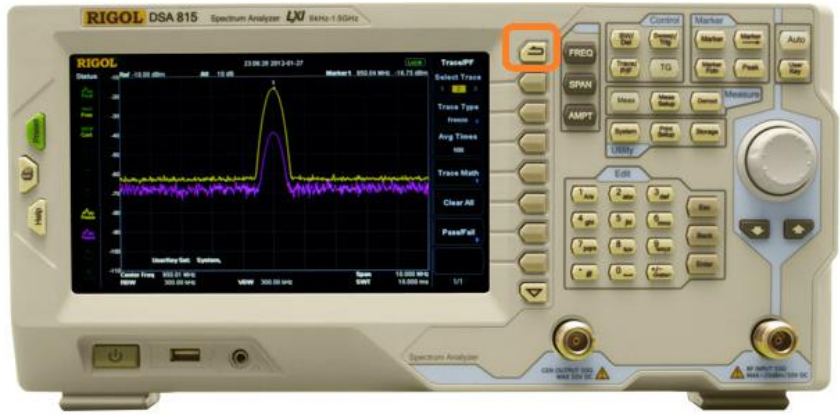


5) Set Format to CSV

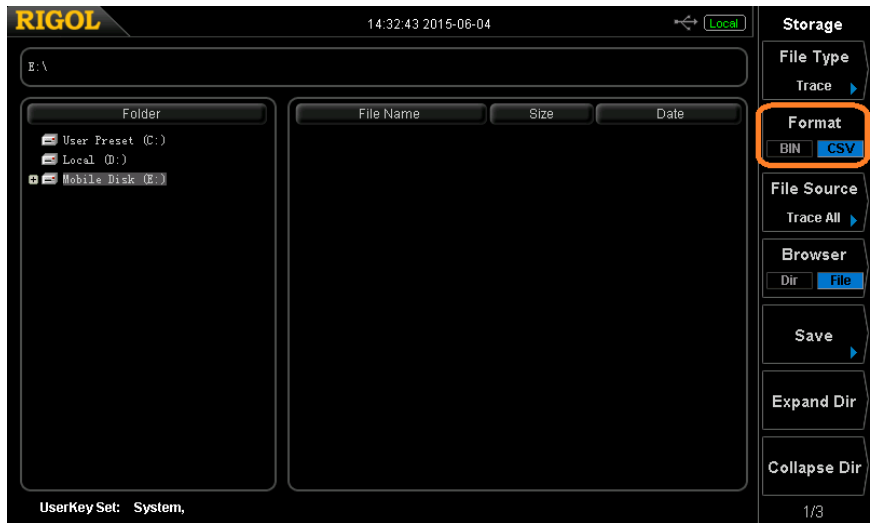



6) Press Save, use the keypad to write a filename (I use numbers, they are faster), and press OK

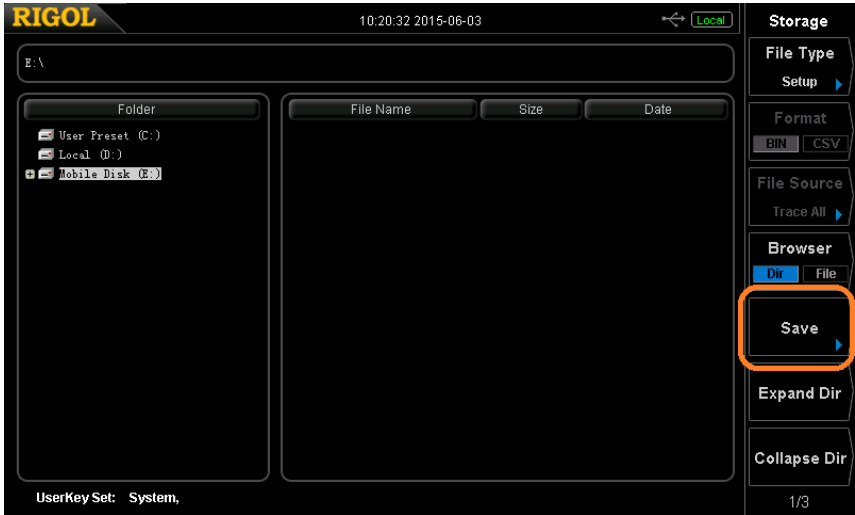



## Headquarters

RIGOL TECHNOLOGIES, INC.  
No.156,Cai He Village,  
Sha He Town,  
Chang Ping District, Beijing,  
102206 P.R.China  
Tel:+86-10-80706688  
Fax:+86-10-80705070  
Email: [support@rigol.com](mailto:support@rigol.com)

## USA

RIGOL TECHNOLOGIES,USA INC.  
102000 SW Allen Blvd, Suite C  
Beaverton  
OR 97005, USA  
Toll free: 877-4-RIGOL-1  
Office: (440) 232-4488  
Fax: (216)-754-8107  
Email: [info@rigol.com](mailto:info@rigol.com)

## EUROPE

RIGOL TECHNOLOGIES GmbH  
Lindbergh str. 4  
82178 Puchheim  
Germany  
Tel: 0049- 89/89418950  
Email: [info-europe@rigoltech.com](mailto:info-europe@rigoltech.com)